


1 Performance Index

Resonant Frequency	高斯贝尔数码科技股份有限公司 GOSPELL DIGITAL TECHNOLOGY CO., LTD		
ϵ_r DK	Medium: 45 ± 1 ; Support: 9.8 ± 1		
Quality Factor Q	>7300 Supplied by Huawei		
Temperature Drift Coefficient	3.5 ± 1 PPM/°C		

2 Structural Performance (mm)

Medium Outer Diameter	$\phi 20 \pm 0.2$	Medium Hight	9.0 ± 0.2
Medium Diameter	$\phi 6.2 \pm 0.2$	Support Hight	4.0 ± 0.1
Support Outer Diameter	$\phi 15 \pm 0.15$	Support Diameter	$\phi 3.2 \pm 0.15$

Product Str

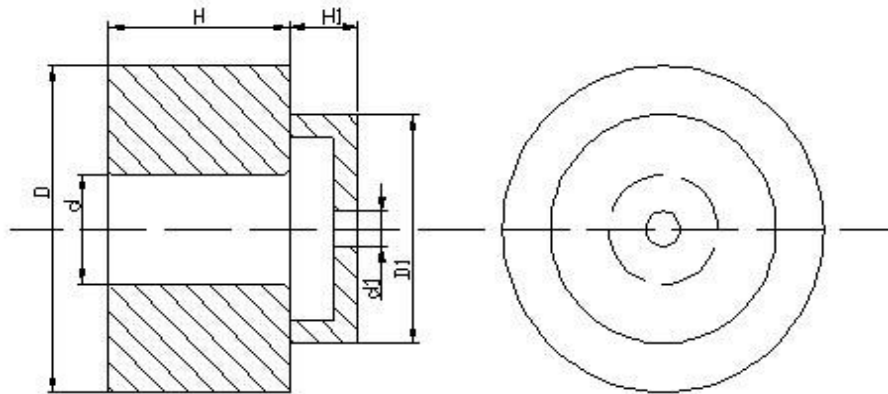

3 Operating and Storage

Operating Temperature	$-40 \sim +90^\circ\text{C}$
Storage Environment	Should be stored in a cool, dry, clean and be non-corrosive gases warehouse, temperature $-10 \sim +40^\circ\text{C}$, relative humidity (RH) $45\% \sim 75\%$